


CFL-ST002

STANDARD SERIES: $\frac{1}{4}$ " FRACTURED FIN

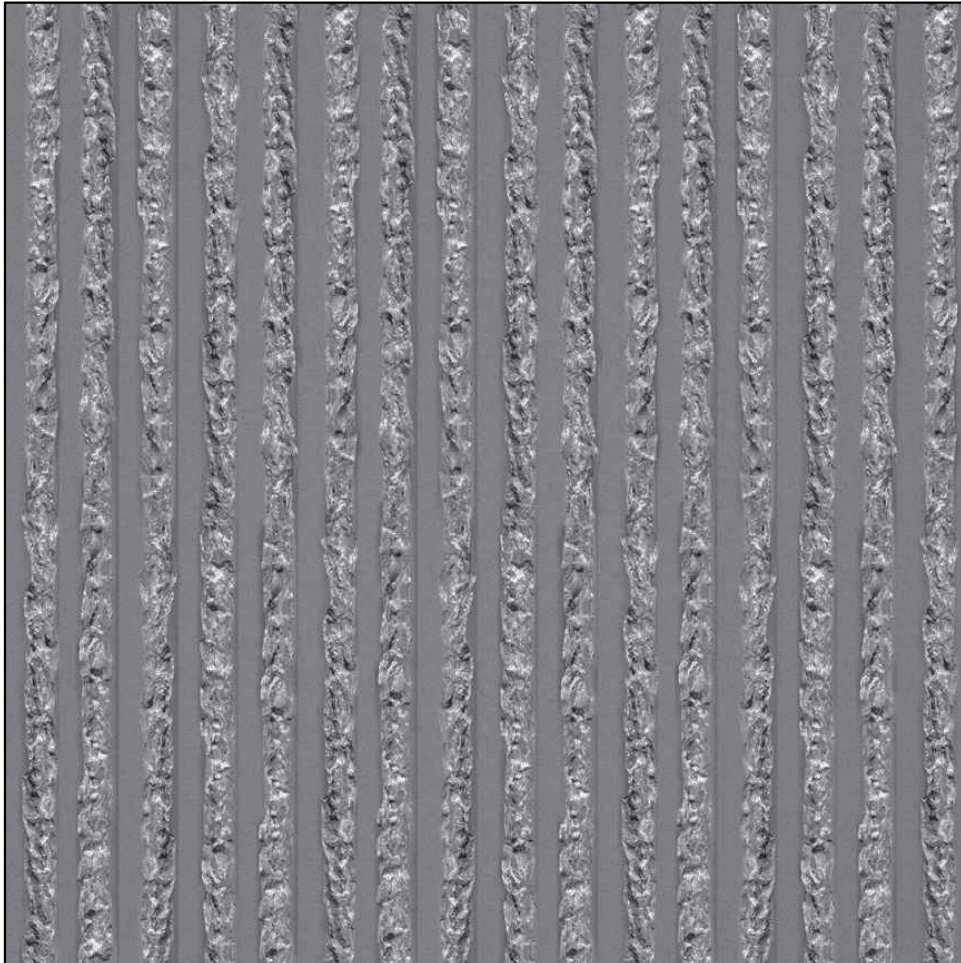

General Product Description

Liner Dimensions: To order

Depth of Relief: $\frac{1}{4}$ " Max.

Dimensions and surface texture may vary according to project specifications

Fabrication and Installation

All liners are fabricated from urethane rubber (+/- 50 uses)

Form liners can be reinforced with wood or other suitable material as specified




Release Agents

Release agents must be approved and applied according to CFL's installation instructions

NO SUBSTITUTIONS WILL BE ALLOWED WITHOUT PRIOR WRITTEN APPROVAL FROM PRODUCT ENGINEER OR ARCHITECT
Please call CFL for full specifications and installation instructions for our form liner products

CFL-ST002

STANDARD SERIES: $\frac{1}{4}$ " FRACTURED FIN

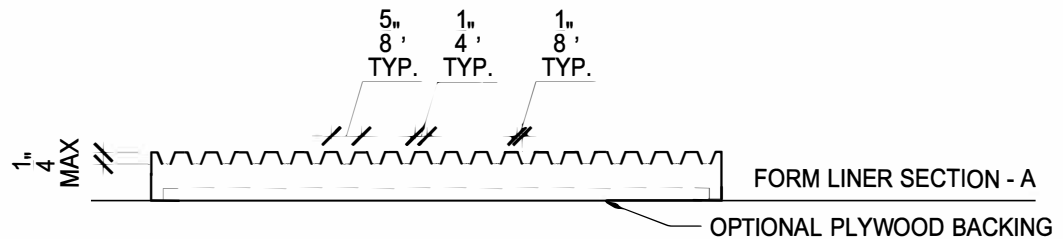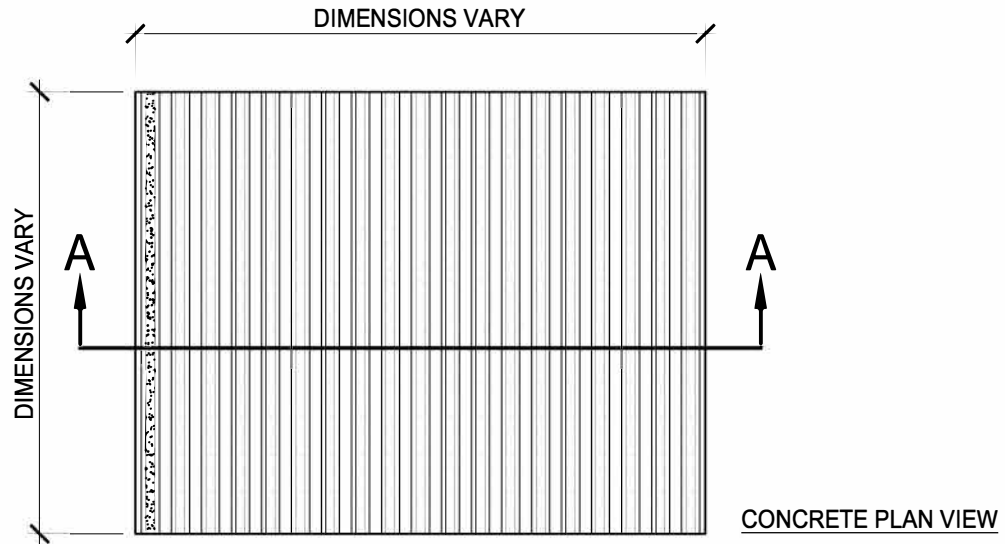

NOTE: FORM LINER THICKNESS VARIES ACCORDING TO THE SIZE OF THE PANEL.

NO SUBSTITUTIONS WILL BE ALLOWED WITHOUT PRIOR WRITTEN APPROVAL FROM PRODUCT ENGINEER OR ARCHITECT
Please call CFL for full specifications and installation instructions for our form liner products