


CFL-ST007: Fluted Fractured Fin

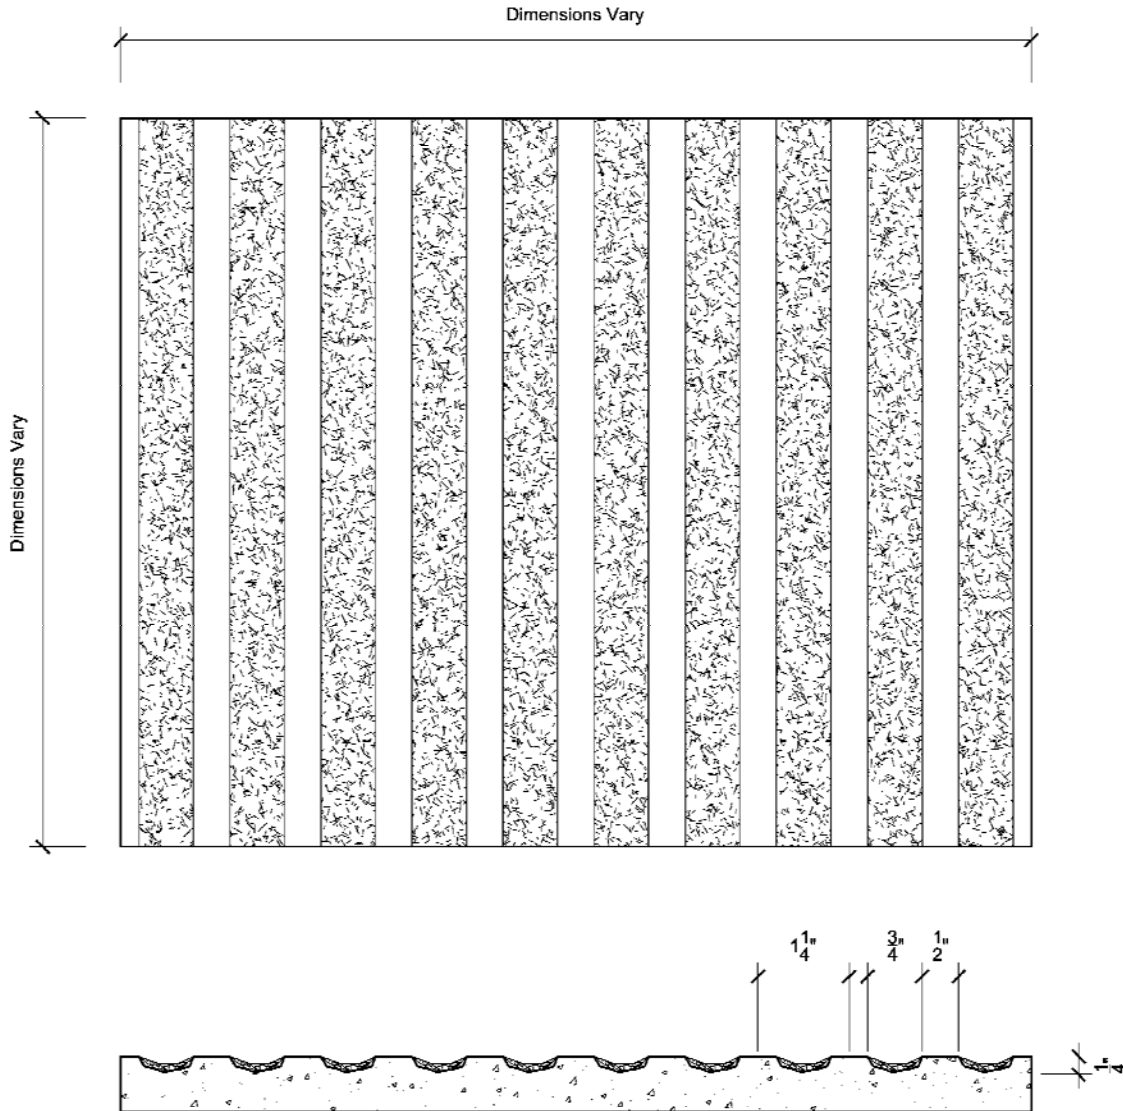

Note: Formliner thickness varies according to the size of the panel.

General Product Description

Dimensions and surface textures vary according to project specifications.

Fabrication and Installation

- All liners with depths greater than 1" are normally fabricated from fiberglass; liners with depths less than 1" may be fabricated from fiberglass or rubber.
- CFL rubber liners can be factory-mounted to 1/2" HDO plywood or field laminated per CFL's installation instructions.
- Fiberglass form liners shall be reinforced with wood or other suitable material on approximately 0.304m centers, or as otherwise specified; please see website or call for Typical Fiberglass specifications.

Release Agents

Release agent must be approved and applied according to CFL's installation instructions.

NO SUBSTITUTIONS WILL BE ALLOWED WITHOUT PRIOR WRITTEN APPROVAL FROM PROJECT ENGINEER OR ARCHITECT.
Please contact CFL for full specifications and installation instructions for our liner products.